




TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973

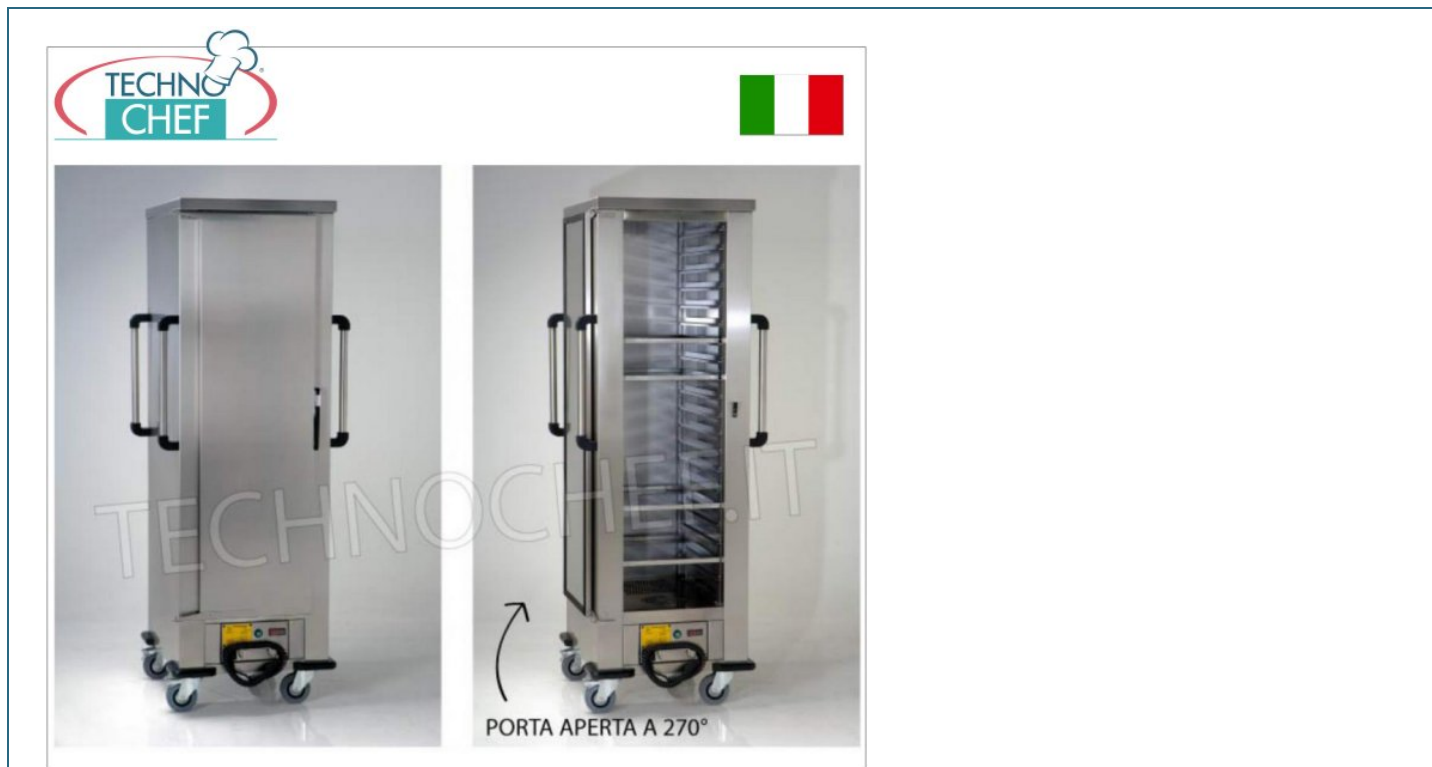

CODE	DESCRIPTION	PRICE/DELIVERY
MZ690.AS	HOT MAINTENANCE trolley with VENTILATED HEATING, 1 Door, for 12 Gastro-Norm or Euro-Norm TRAYS, PITCH between GUIDES mm 120, V. 230/1, Kw 2.0, Dimensions mm 670x790x1995h	€ 1.468,42 <i>VAT excluded</i> Shipping to be calculated Delivery from 8 to 15 days

PROFESSIONAL DESCRIPTION

VENTILATED HOT MAINTENANCE trolley , for 12 Gastro-Norm or Euro-Norm trays - Pitch between guides 120 mm :

- made entirely of **AISI 304-18/10 stainless steel sheet, Scotch-Brite finish** ;
- **double wall structure** , made with **sandwich panels insulated** with expanded polyurethane and aluminum positioned between the two sheet metal walls;
- **Front swing door that opens to 270** with **rubber seal** and **snap opening handle**;
- **pair of push handles** positioned **on both short sides** , with **PVC handle supports**, **AISI 304-18/10 stainless steel** grip tube, the **handles** can be **used even with the doors open**;
- illuminated power switch with **mains presence indicator light** ;
- **temperature controlled** by a **digital thermostat-thermometer** , a red light signals the functioning of the resistance;
- **removable ventilated heating system for easy and convenient cleaning**;
- internal 'L' profiled **supports** , **depth 75 mm, pitch 120 mm** ;
- **wheels with a diameter of 125 mm** , **two swivel** with brake and **two fixed** with galvanized steel support;
- **perimeter bumper** in **gray anti-track rubber**.
- **OPTIONAL - ACCESSORIES:**
- **Door lock**;
- **Manual humidifier**.

MADE IN ITALY

TECHNICAL CARD

power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	2
breadth (mm)	770

depth (mm)	750
-------------------	-----

height (mm)	2000
--------------------	------