




TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973

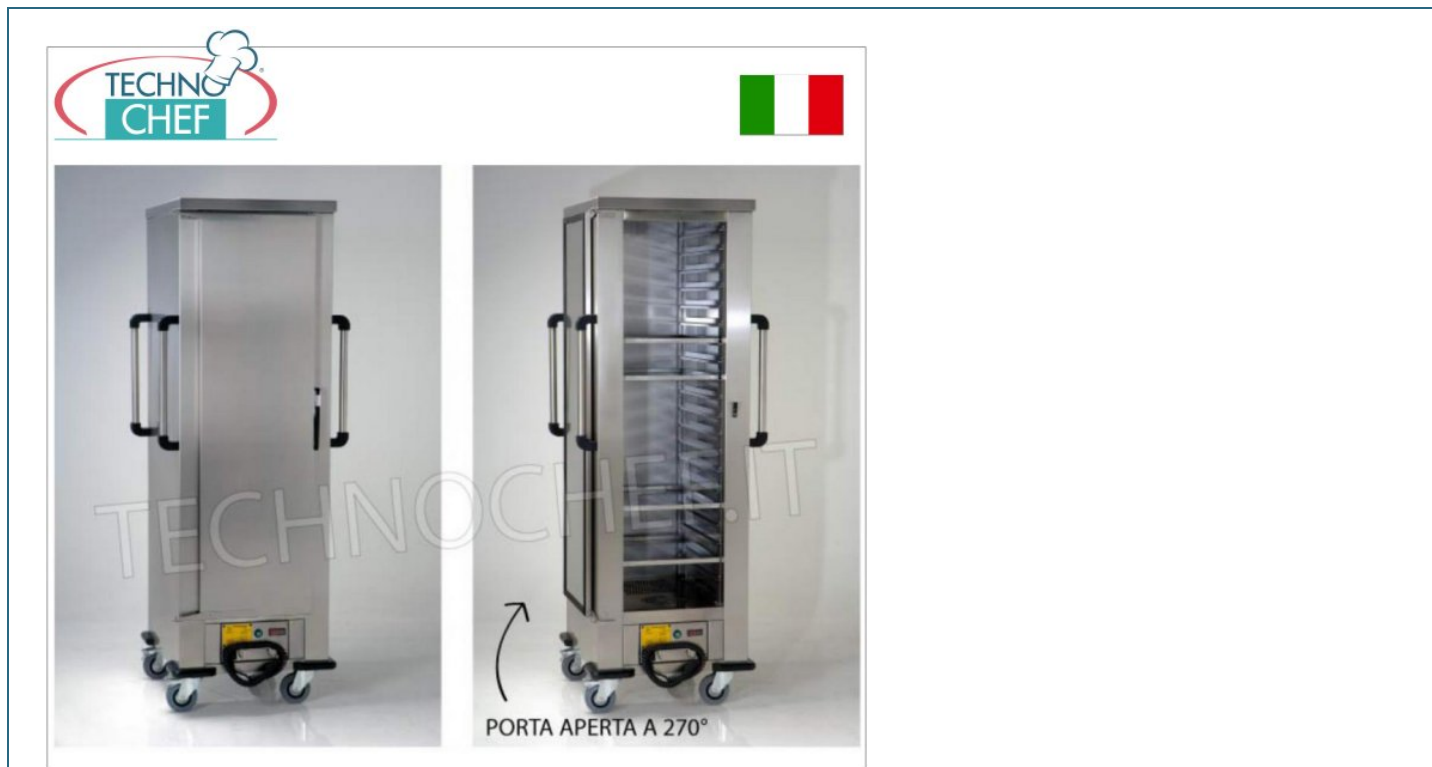

CODE	DESCRIPTION	PRICE/DELIVERY
MZ690.AG	HOT MAINTENANCE trolley with VENTILATED HEATING, Temp. adjustable from +30° to + 90°C. , 1 Door, Capacity 18 Gastro-Norm 1/1 PANS, PITCH between GUIDES 77 mm, V. 230/1, Kw 2.0, dimensions 670x790x1995h mm	€ 1.457,77 <i>VAT excluded</i> Shipping to be calculated Delivery from 8 to 15 days

PROFESSIONAL DESCRIPTION

VENTILATED HOT MAINTENANCE trolley , for 18 Gastro-Norm 1/1 pans, with 77 mm pitch between the guides :

- made entirely of **AISI 304-18/10 stainless steel sheet, Scotch-Brite finish** ;
- **double wall structure** , made with **sandwich panels insulated** with expanded polyurethane and aluminum positioned between the two sheet metal walls;
- **Front swing door that opens 270°** with **rubber seal** and **snap opening handle**;
- **pair of push handles** positioned **on both short sides** , with **PVC** handle supports, **AISI 304-18/10 stainless steel** grip tube, the **handles** can be **used even with the doors open**;
- illuminated power switch with **mains presence indicator light** ;
- **temperature controlled** by a **digital thermostat-thermometer** , **from + 30° to 90°C.** - a red light signals the operation of the resistance;
- **removable ventilated heating system for easy and convenient cleaning**;
- **internal supports with 'C' profiles with anti-tipping function, 77 mm pitch**;
- **wheels with a diameter of 125 mm** , two swivel with brake and two fixed with **galvanized steel support**;
- **perimeter bumper in gray anti-track rubber.**
- **OPTIONAL - ACCESSORIES:**
- **Door lock**;
- **Manual humidifier.**

CE mark
MADE IN ITALY

TECHNICAL CARD

power supply	Monofase
Volts	V 230/1
frequency (Hz)	50

motor power capacity (Kw)	2
----------------------------------	----------

breadth (mm)	770
---------------------	------------

depth (mm)	750
-------------------	------------

height (mm)	2000
--------------------	-------------