



TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973



CODE	DESCRIPTION	PRICE/DELIVERY
TCF055-0420	DISHWASHER with 500x500 mm SQUARE rack, DIGITAL CONTROLS, 3 cycles of 20-30-40 racks/hour, USABLE HEIGHT Max 350 mm, with RINSE AID and TANK DETERGENT dispenser, V.400/3+N, Kw.5.05, Weight 49 Kg, dim.mm.572x633x814h	€ 1.183,87 <i>VAT excluded</i> Shipping to be calculated Delivery from 8 to 15 days
PROFESSIONAL DESCRIPTION		

DISHWASHER with 500x500mm SQUARE rack, Max USEFUL height 350mm, yield 20-30-40 racks/hour, DIGITAL controls :

- **partial double-wall bodywork** , which guarantees a **reduction in heat dispersion of 25%**;
- **fully molded self-cleaning tank** to facilitate the flow of impurities;
- **anti-drip roof**;
- **molded basket supports** to **facilitate cleaning of the machine** as well as for greater ergonomics;
- **washing and rinsing arms** in **AISI 304 stainless steel**;
- **Thermostop system** to guarantee rinsing at the appropriate temperature for correct sanitization of the object to be washed;
- **multichromatic electronic control panel** which allows the display of the different operating stages of the dishwasher;
- **soft start of the washing pump** to prevent lighter objects from tipping over due to the initial start of the pump;
- **provision for drain pump as standard** ;
- **2 electric rinse aid and tub detergent dispensers integrated** and adjustable from the control panel;
- non-return valve as standard;
- **self-cleaning cycle** of the tank at the end of the day;
- **possibility of washing up to 7 GN1/1 trays** (53x32.5 cm) with **a maximum height of 350 mm**;
- **3 wash cycles of 90/120/180 sec + continuous cycle** ;
- **hourly productivity : 40-30-20 baskets/h** ;
- **useful washing height: 350 mm** ;
- water consumption per cycle 2 liters;
- **washing pump power Kw.0.55** ;
- tank capacity: 20 litres;
- boiler capacity: 5 litres;
- tank resistance: 2.4 kW;
- boiler resistance: 4.5 kW;
- dim.mm.572x633/1038x814h
-

Supplied :

- 1 basket 500 x 500 mm for 12/18 plates;
- 1 Glass basket 500 x 500 m;
- 1 Spoon Holder Basket;
- 1 water inlet hose (2 m long);
- 1 Drain Hose (2.5 m long).

Accessories/Options :

- **Drain pump kit**
- **Full tank stainless steel filter kit** for 50x50 mod
- **Stainless steel basket holder base** for mod. 50x50
- Basket of glasses 50x50 cm
- Plates basket 50x50 cm

CE mark
Made in Italy

TECHNICAL CARD		
	power supply	Trifase
	Volts	V 400/3 +N
	frequency (Hz)	50
	motor power capacity (Kw)	5,05
	net weight (Kg)	49
	gross weight (Kg)	57
	breadth (mm)	572
	depth (mm)	633
	height (mm)	814
TECHNICAL CARD		
CODE/PICTURES	DESCRIPTION	PRICE/DELIVERY

TCF055-0450



Basket 50x50 plates
500x500 mm dish basket

€ 32,40

VAT excluded
Shipping to be calculated

Delivery from 4 to 9 days

TCF055-0460



Basket 50x50 glasses
500x500 mm glasses basket

€ 29,46

VAT excluded
Shipping to be calculated

Delivery from 4 to 9 days

TCF055-0475



Tank Filter Kit
Tank filter kit for mod. 50x50

€ 93,60

VAT excluded
Shipping to be calculated

Delivery from 4 to 9 days

TCF055-0485



Drain Pump Kit
Underbase drain pump kit

€ 93,60

VAT excluded
Shipping to be calculated

Delivery from 4 to 9 days

TCF055-0470





Base unit for dishwasher with guides for 50x50 cm baskets
Stainless steel base suitable for dishwashers with basket guides cm.50x50, dim.cm.57x62x55/61h.

€ 250,13

VAT excluded
Shipping to be calculated

Delivery from 4 to 9 days

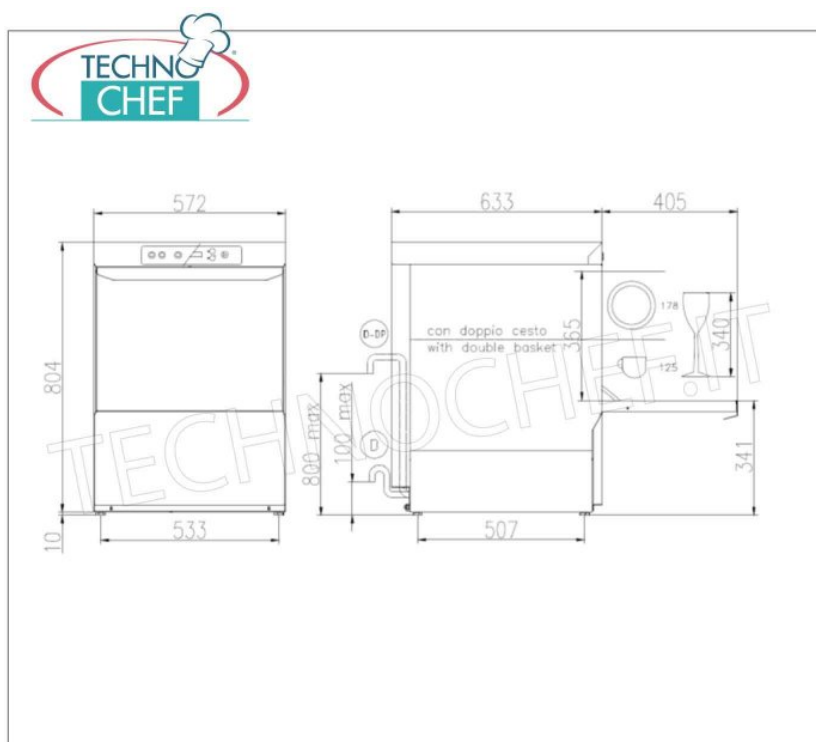

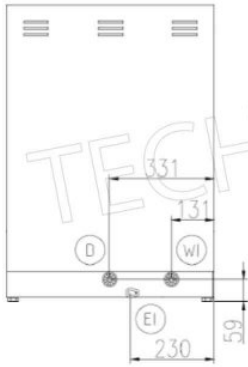

- EI** CAVO DI ALIMENTAZIONE
POWER CORD SUPPLY
CABLE D'ALIMENTATION
CABLE DE ALIMENTACION
- WI** CANNA DI SCARICO Ø 3/4" L=2000 mm
Ø 3/4" INLET HOSE L=2000 mm
TUYAU D'ALIMENTATION Ø 3/4" L=2000 mm
TUBO DE ALIMENTACION Ø 3/4" L=2000 mm
- D** TUBO DI SCARICO Ø 29 mm L=2500 mm
DRAIN HOSE Ø 29 mm L=2500 mm
TUYAU DE VIDANGE Ø 29 mm L=2500 mm
TUBO DE DESAGUE Ø 29 mm L=2500 mm
- D-DP** TUBO DI SCARICO Ø 29 mm L=2500 mm (CON POMPA SCARICO)
DRAIN HOSE Ø 29 mm L=2500 mm (WITH DRAIN PUMP)
TUYAU DE VIDANGE Ø 29 mm L=2500 mm (AVEC POMPE DE VIDANGE)
TUBO DE DESAGUE Ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)