



TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973



CODE	DESCRIPTION	PRICE/DELIVERY
TCF055-0310	GLASSWASHERS-CUP WASHERS Bar, 400x400 mm SQUARE basket, DIGITAL controls, 3 cycles of 20-30-40 baskets/hour, max height of glasses 30 cm, with RINSE AID and TANK DETERGENT dispenser, V.230/1, Kw.3,2, Weight 37 Kg, dim.mm.455x550x700h.	€ 917,64 <i>VAT excluded</i> Shipping to be calculated Delivery from 8 to 15 days
PROFESSIONAL DESCRIPTION		

GLASSWASHER with SQUARE rack measuring 400x400 mm or Round rack diameter 400 mm with specific support, yield 40-30-20 racks/hour, DIGITAL controls:

- **washing and rinsing arms** in **AISI 304 stainless steel** , easily inspectable;
- **fully molded self-cleaning tank** to facilitate the flow of impurities;
- **molded basket supports** to facilitate cleaning of the machine as well as for greater ergonomics
- **multichromatic electronic control panel** which allows the display of the different operating stages of the dishwasher;
- **soft start of the washing pump** to prevent lighter objects from tipping over due to the initial start of the pump;
- **Thermostop system** to guarantee rinsing at the appropriate temperature for correct sanitization of the object to be washed;
- **anti-drip roof** ;
- **ease of maintenance** : the most sensitive components have been positioned on the front of the machine (solenoid valve, thermostats, resistors, dispensers, pump, etc.);
- **self-cleaning cycle** of the tank at the end of the day;
- **control panel removable** from the front;
- **preparation of drain pump** ;
- **integrated electric rinse aid and tub detergent dispensers** , adjustable from the control panel;
- **non-return valve as standard** ;
- **partial double-wall bodywork** , which guarantees a reduction in heat dispersion of 25%;
- double-walled door;
- **3 wash cycles of 90/120/180 sec + continuous cycle** ;
- **hourly productivity: 40-30-20 baskets/hour** ;
- **useful washing height: 300 mm** ;
- water consumption per cycle 2 liters;
- tank capacity: 12 litres;
- boiler capacity: 3 litres;
- **washing pump power Kw.0.2** ;
- tank resistance: 2.4 kW;
- boiler resistance: Kw.3.00;
- dim.mm.455x550/891x700h.

- **NOTE**
- By ordering the **appropriate SUPPORT** , it is possible to use **round baskets with a diameter of 400 mm**


- Supplied :**
- 2 Glass Baskets 400 x 400 mm,
 - 1 Spoon Holder Basket,
 - 1 saucer rack,
 - 1 water inlet hose (2 m long),
 - 1 Drain Hose (2.5 m long).

- Accessories/Options :**
- **Round basket support mod. 400x400 cm** ,
 - **Round basket diam.400 mm.**
 - Drain pump kit,

CE mark
Made in Italy

TECHNICAL CARD		
	power supply	Monofase
	Volts	V 230/1
	frequency (Hz)	50
	motor power capacity (Kw)	3,2
	net weight (Kg)	37
	gross weight (Kg)	44
	breadth (mm)	455
	depth (mm)	550
	height (mm)	700
TECHNICAL CARD		
CODE/PICTURES	DESCRIPTION	PRICE/DELIVERY

TCF055-0370



Round Basket Support
Round basket support diam.40 cm

€ 14,73
VAT excluded
Shipping to be calculated
Delivery from 4 to 9 days

TCF055-0360



40x40 Square Basket
Square basket 40x40 cm

€ 24,74
VAT excluded
Shipping to be calculated
Delivery from 4 to 9 days


TCF055-0350



Round Basket Ø 40
Round basket diam.40 cm

€ 28,28
VAT excluded
Shipping to be calculated
Delivery from 4 to 9 days



TCF055-0485



Drain Pump Kit
Underbase drain pump kit

€ 93,60
VAT excluded
Shipping to be calculated
Delivery from 4 to 9 days



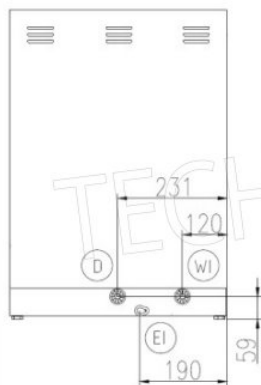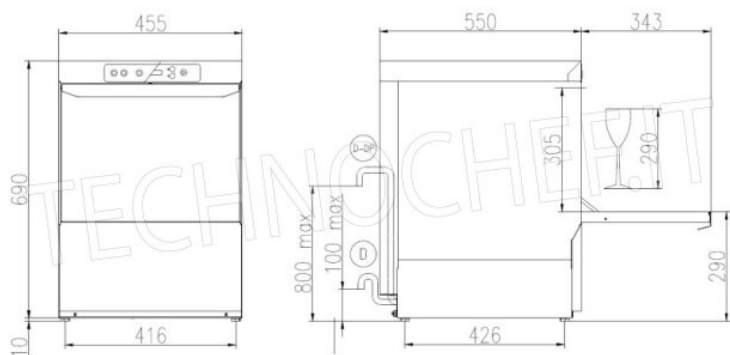

- (EI) CAVO DI ALIMENTAZIONE
POWER CORD SUPPLY
CABLE D'ALIMENTATION
CABLE DE ALIMENTACION
- (WI) CANNA DI CARICO G 3/4 L=2000 mm
G 3/4 INLET HOSE L=2000 mm
TUYAU D'ALIMENTATION G 3/4" L=2000 mm
TUBO DE ALIMENTACION G 3/4" L=2000 mm
- (D) TUBO DI SCARICO Ø 29 mm L=2500 mm
DRAIN HOSE Ø 29 mm L=2500 mm
TUYAU DE VIDANGE Ø 29 mm L=2500 mm
TUBO DE DESAGUE Ø 29 mm L=2500 mm
- (D-DF) TUBO DI SCARICO Ø 29 mm L=2500 mm (CON POMPA SCARICO)
DRAIN HOSE Ø 29 mm L=2500 mm (WITH DRAIN PUMP)
TUYAU DE VIDANGE Ø 29 mm L=2500 mm (AVEC POMPE DE VIDANGE)
TUBO DE DESAGUE Ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)