



**TECNOSERVICE'21 srl**

by Tinti Sergio  
Via Carlo Pisacane, 134  
61032 Fano (PU) Italy  
P.IVA IT0200411413

Tel. +39 0721 805911  
FAX +39 0721 809794  
e-mail: [staff@technochef.it](mailto:staff@technochef.it)  
[www.technochef.it](http://www.technochef.it)  
[www.technochef.eu](http://www.technochef.eu)

Services and Technologies for professional catering since 1973



PROFESSIONAL DESCRIPTION

### Modular prefabricated COLD ROOM for temperatures -2° +8°C :

- made with modular sandwich panels , 70 mm thick, in non-toxic white pre-painted sheet metal , insulated with high density polyurethane , 40-42 kg/cubic meters (95% closed cells)
- Panel locking with the use of eccentric hooks;
- revolving door with clear light to choose from the following sizes: 600x1850 mm, 700x1850 mm, 800x1850 mm, 900x1850 mm;
- easily adjustable door hinges in 3 directions;
- handle with lock and safety release from the inside in phosphorescent material;
- PED walkable floor made of anti-slip AISI 304 stainless steel sheet, STATIC CAPACITY 1500 Kg/m², PUNCTUAL CAPACITY 100 Kg;
- rounded internal corners for maximum hygiene and ease of cleaning,
- prearranged for wall-mounted single-block refrigeration units ,
- on request it is possible to install monobloc units on the ceiling or refrigeration units with remote group ,
- supplied disassembled and packed on pallets (on request in a wooden crate),
- 
- INTERNAL DIMENSIONS : mm 1600x1600x2000h.
- net capacity: 5.12 cubic meters,
- EXTERNAL DIMENSIONS: mm 1740x1740x2140h

### Accessories:

- Internal shelving made of 20 micron anodized aluminum with 3 rows of gridded shelves.
- Crawl space for floor ventilation made of plastic profile.
- Door curtain in transparent plastic strips.
- Door microswitch and internal light .

### Options on request:

- Driveway and reinforced floor
- Ceiling refrigeration units
- Split ( remote ) refrigeration systems
- Possibility of measures other than those proposed.

### MONOBLOCK REFRIGERANT UNIT ( Not Included ) , for Temp. - 2° + 8° C. for WALL-MOUNTED ASSEMBLY, V. 230/1 - Kw 1,4 -- mod. TCF313-L07125N

- External bodywork of the monobloc in galvanized sheet metal;
- frame of the evaporating part in magnesium aluminium;
- ambient operating temperature max +32°C
- ECOLOGICAL refrigerant gas R452a
- hermetic compressor;
- high and low pressure switch with automatic reset,
- automatic hot gas defrosting,
- cable for door switch and door light connection,
- digital telethermometer display with temperature indication and operating status display: cold-defrost-evaporator fans-alarm in progress.
- Temp. Adjustable from: -2° +8° C. ,
- possibility of displaying alarms such as: high and low temperature and pressure, open door, dirty condensation, etc.
- predisposition for connection to the frigotel supervisor

CE mark

Made in Italy

### AVAILABLE MODELS

#### TCF474-TN16-16/S7



#### Cold Room Temp. -2 ° + 8 °, in Modular Panels 7 cm thick, mod.TN16-16 / S7

Prefabricated cold room suitable for normal temperatures (-2 ° + 8 °), made of modular sandwich panels, thickness 70 mm., With revolving door and floor, 5.12 meters / cubic, external dimensions, mm. 1740x1740x2140h

**€ 1.650,28**

VAT excluded

Shipping to be calculated

Delivery from 15 to 25 days

TCF474-L07125N




**Monobloc Refrigerant Unit for Temp. -2° +8° C. --  
Wall mounted**

TN wall mounted monobloc refrigeration unit,  
tropicalised, for normal temperature -2°+8° ventilated,  
with ecological gas R404a, V 230/1, Kw 1,4, weight Kg  
57, external dimensions mm 1020x520x925h

**€ 1.992,33**

*VAT excluded*  
**Shipping to be calculated**

**Delivery** from 15 to 25 days

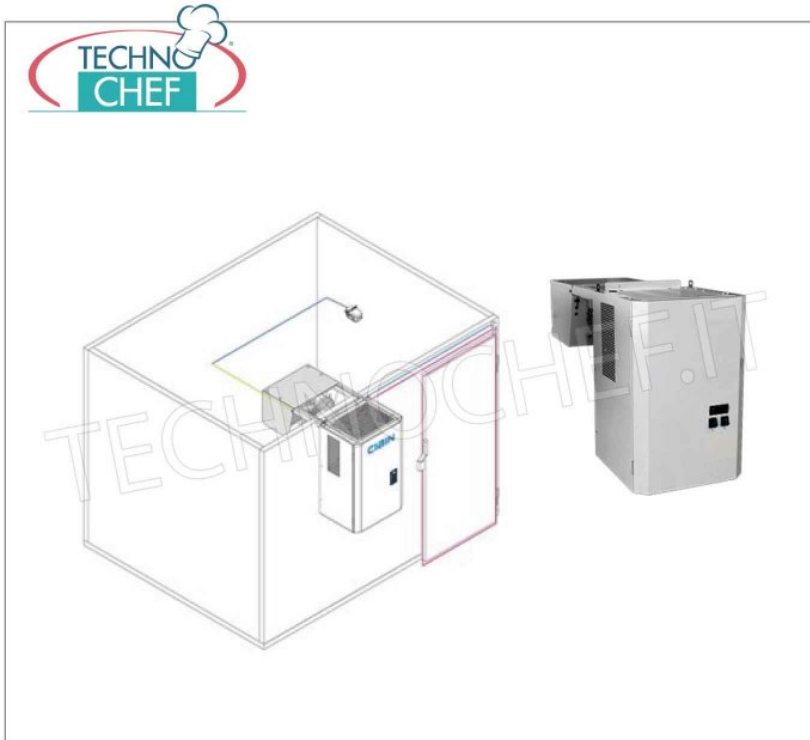




SU RICHIESTA: CELLA SENZA PAVIMENTO



CERNIERE FACILMENTE REGOLABILI IN UTENZA IN 3 DIREZIONI




MANIGLIA STANDARD CON SERRATURA, CHIAVE A SBLOCCO INTERNO DI SICUREZZA

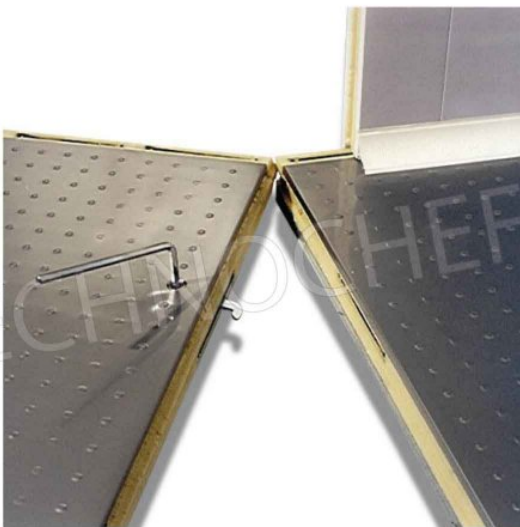

PAVIMENTO STANDARD (NON CARRELLABILE) IN ACCIAIO INOX ANTISDRUCCIOLO, CON SUPPORTO INTERNO INTEGRATO.



PAVIMENTO + PANNELLO: MONTAGGIO SEMPLICE E VELOCE  
TRAMITE FISSAGGIO CON AGGANCIO ECCENTRICO.

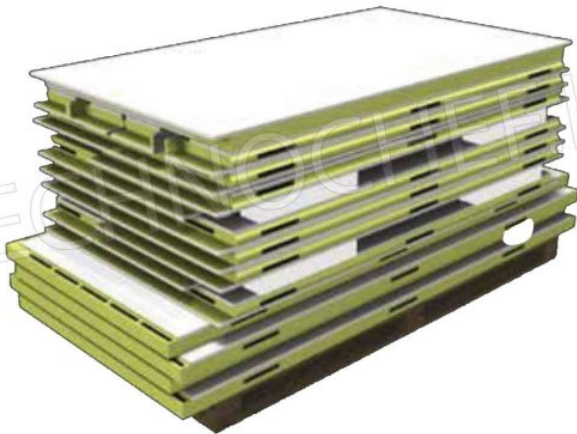

FORNITA SMONTATA E IMBALLATA SU PALLET



SEQUENZA DI MONTAGGIO PANNELLI