



TECNOSERVICE'21 srl
by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973



PROFESSIONAL DESCRIPTION

Modular prefabricated COLD ROOM for temperatures -2° +8°C :

- made with modular sandwich panels , 70 mm thick, in non-toxic white pre-painted sheet metal , insulated with high density polyurethane , 40-42 kg/cubic meters (95% closed cells)
- Panel locking with the use of eccentric hooks;
- revolving door with clear light to choose from the following sizes: 600x1850 mm, 700x1850 mm, 800x1850 mm, 900x1850 mm;
- easily adjustable door hinges in 3 directions;
- handle with lock and safety release from the inside in phosphorescent material;
- PED walkable floor made of anti-slip AISI 304 stainless steel sheet, STATIC CAPACITY 1500 Kg/m², PUNCTUAL CAPACITY 100 Kg;
- rounded internal corners for maximum hygiene and ease of cleaning,
- prearranged for wall-mounted single-block refrigeration units ,
- on request it is possible to install monobloc units on the ceiling or refrigeration units with remote group ,
- supplied disassembled and packed on pallets (on request in a wooden crate),
-
- INTERNAL DIMENSIONS : mm 1600x2800x2000h.
- net capacity: 8.96 cubic meters,
- EXTERNAL DIMENSIONS: mm 1740x2940x2140h

Accessories:

- Internal shelving made of 20 micron anodized aluminum with 3 rows of grided shelves.
- Crawl space for floor ventilation made of plastic profile.
- Door curtain in transparent plastic strips.
- Door microswitch and internal light .

Options on request:

- Driveway and reinforced floor
- Ceiling refrigeration units
- Split (remote) refrigeration systems
- Possibility of measures other than those proposed.

MONOBLOCK REFRIGERANT UNIT (Not Included) , for Temp. - 2° + 8° C. for WALL-MOUNTED ASSEMBLY, V. 230/1 - Kw 1,6 -- mod. TCF313-L11130N

- External bodywork of the monobloc in galvanized sheet metal;
- frame of the evaporating part in magnesium aluminium;
- ambient operating temperature max +32°C
- ECOLOGICAL refrigerant gas R452a
- hermetic compressor;
- high and low pressure switch with automatic reset,
- automatic hot gas defrosting,
- cable for door switch and door light connection,
- digital telethermometer display with temperature indication and operating status display: cold-defrost-evaporator fans-alarm in progress.
- Temp. Adjustable from: -2° +8° C. ,
- possibility of displaying alarms such as: high and low temperature and pressure, open door, dirty condensation, etc.
- predisposition for connection to the frigotel supervisor

CE mark

Made in Italy

AVAILABLE MODELS

TCF474-TN16-28/S7



Cold Room Temp. -2 ° + 8 ° , in Modular Panels 7 cm thick, mod.TN16-28 / S7

Prefabricated cold room suitable for normal temperatures (-2 ° + 8 °), made of modular sandwich panels, thickness 70 mm., With revolving door and floor, 8.96 meters / cubic, external dimensions, mm. 1740x2940x2140h

€ 2.383,66

VAT excluded

Shipping to be calculated

Delivery from 15 to 25 days

TCF474-L11130N




**Monobloc Cooling Unit for Temp. -2 ° + 8 ° C. -
Wall mounted**

TN wall-mounted monobloc refrigerating unit,
tropicalized, for normal temperature -2 ° + 8 ° ventilated,
with ecological gas R404a, V 230/1, Kw 1,6 - weight Kg
85, external dimensions mm 1035x735x1040h

€ 2.597,99

VAT excluded
Shipping to be calculated

Delivery from 15 to 25 days

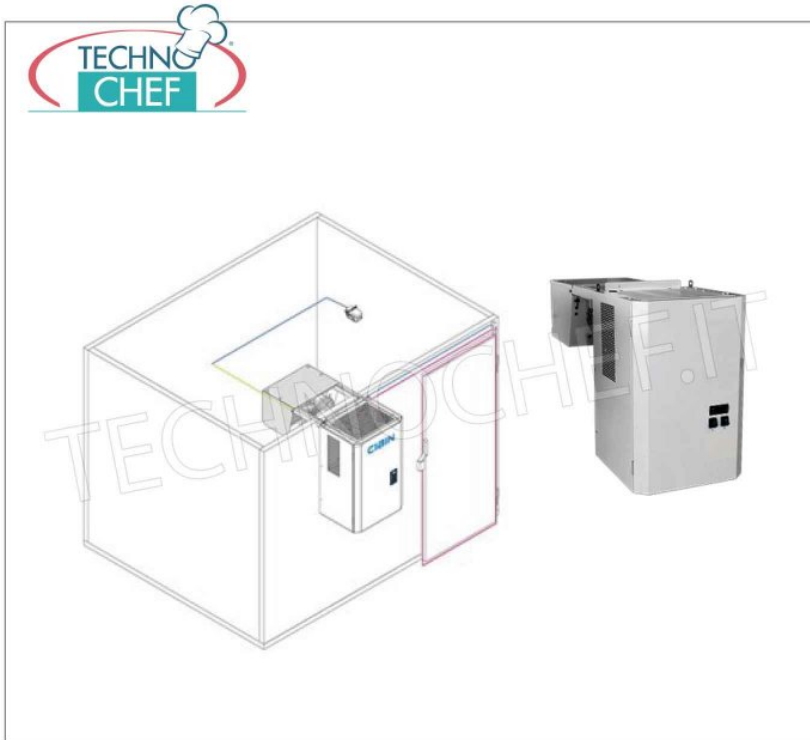




SU RICHIESTA: CELLA SENZA PAVIMENTO



CERNIERE FACILMENTE REGOLABILI IN UTENZA IN 3 DIREZIONI




MANIGLIA STANDARD CON SERRATURA, CHIAVE A SBLOCCO INTERNO DI SICUREZZA

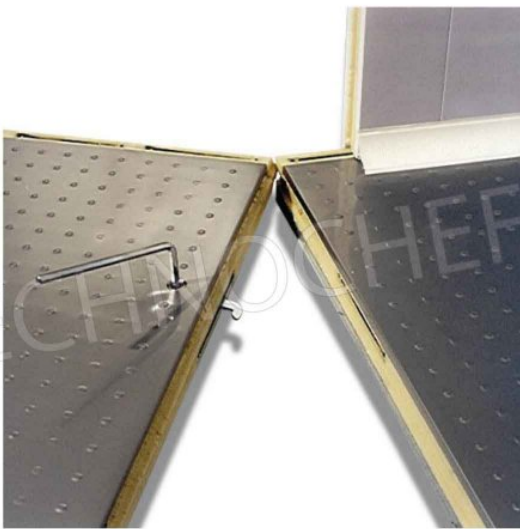

PAVIMENTO STANDARD (NON CARRELLABILE) IN ACCIAIO INOX ANTISDRUCCIOLO, CON SUPPORTO INTERNO INTEGRATO.



PAVIMENTO + PANNELLO: MONTAGGIO SEMPLICE E VELOCE
TRAMITE FISSAGGIO CON AGGANCIO ECCENTRICO.

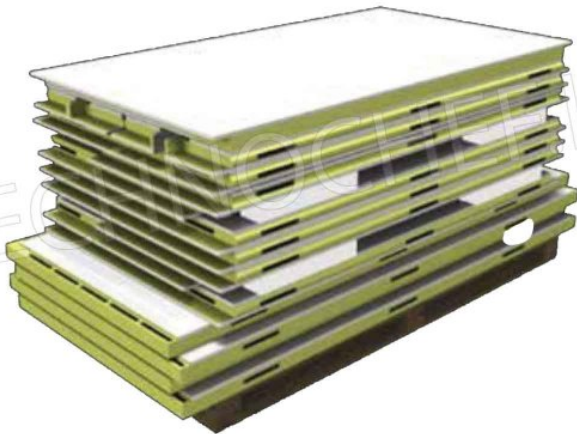

FORNITA SMONTATA E IMBALLATA SU PALLET



SEQUENZA DI MONTAGGIO PANNELLI