



CODE	DESCRIPTION	PRICE/DELIVERY
TCF024-002500	Manual vertical FLYWHEEL slicer for cured meats, blade diameter 300 mm, standard colours: RED, BLACK and CREAM or customizable on request, dim.mm.600x720x740h.	€ 2.200,02 <i>VAT excluded</i> Shipping to be calculated Delivery from 4 to 9 days

PROFESSIONAL DESCRIPTION

MANUAL FLYWHEEL SLICER, blade diameter 300 mm, made of aluminum alloy and steel parts, with fire enamelling:

- **built in aluminum and steel parts** with a **fire-painted finish**, it is a **true jewel with a design** with attention to the smallest detail,
- **cutting thickness from 0 to 2.5 mm** - 9 positions,
- **cutting capacity: mm 230x190h** ,
- built-in sharpener,
- the flywheel has a manual function and **can therefore work even in places without electricity**,
- robust, durable and reliable, a product for true connoisseurs,
- equipped with **ring protection around the blade in accordance with EEC standards**,
- **totally customizable** in terms of color and finishes,
- standard **colours : red, black, cream** (to be specified when ordering).

Accessories/Options:

- rose flowered shuttlecock
- pedestal

NB : BASIC VERSION WITH SMOOTH FLYWHEEL . The flowered shuttlecock is an optional, see price in the accessories.



CE MARK
MADE IN ITALY

TECHNICAL CARD


gross weight (Kg)	51
breadth (mm)	600
depth (mm)	720

height (mm) | 740

TECHNICAL CARD


CODE/PICTURES	DESCRIPTION	PRICE/DELIVERY
<p>TCF024-005008</p> 	<p>TECHNOCHEF - Flywheel Pink 250/300 Rose flowered flywheel for flywheel / manual slicers Mod. 250/300</p>	<p>€ 139,27 <i>VAT excluded</i> Shipping to be calculated Delivery from 4 to 9 days</p>
<p>TCF024-005001</p> 	<p>TECHNOCHEF - Pedestal, Mod.PD250 / 300 Pedestal for flywheel / manual slicers Mod. 250/300 - Weight Kg. 56 - Diameter mm. 650x800h</p>	<p>€ 807,70 <i>VAT excluded</i> Shipping to be calculated Delivery from 8 to 15 days</p>



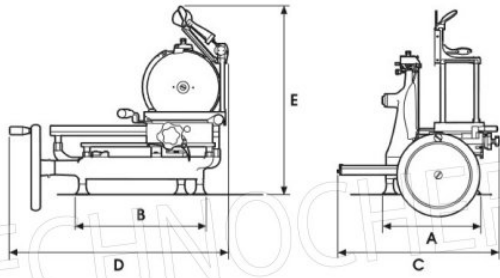

F 300 VOLANO

A mm	340
B mm	400
C mm	600
D mm	720
E mm	740
kg	45,5

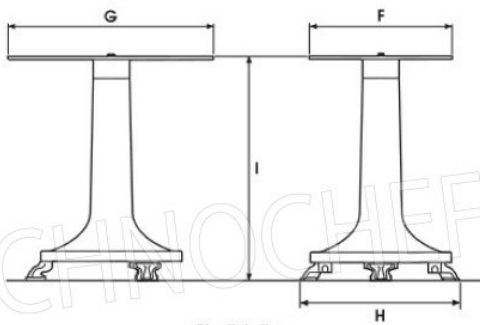

Piedistallo

F mm	400
G mm	500
H mm	650
I mm	800
kg	46