



TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973



CODE	DESCRIPTION	PRICE/DELIVERY
TCF055-0400	DISHWASHER with 500x500 mm QUADRO basket, ELECTROMECHANICAL CONTROLS, 2 Wash Cycles for 30-40 baskets/hour, Max Useful height 350 mm, RINSE AID dispenser, V.230/1, Kw.3.55, Weight 49 Kg, dim.mm .572x633x814h	€ 1.068,86 <i>VAT excluded</i> Shipping to be calculated Delivery from 8 to 15 days

PROFESSIONAL DESCRIPTION

DISHWASHER with SQUARE basket measuring 500x500 mm, USEFUL washing height Max 350 mm, output 30-40 baskets/hour, ELECTROMECHANICAL controls :

- **partial double-wall bodywork** , which guarantees a reduction in heat dispersion of 25%;
- **fully molded self-cleaning tank** to facilitate the flow of impurities;
- **anti-drip roof** ;
- **washing and rinsing arms** in **AISI 304 stainless** steel;
- **molded basket supports** to facilitate cleaning of the machine as well as for greater ergonomics;
- **Thermostop system** to guarantee rinsing at the appropriate temperature for correct sanitization of the object to be washed;
- **control panel removable from the front** ;
- **provision for drain pump as standard** ;
- **rinse aid dispenser as standard** ;
- non-return valve as standard;
- **possibility of washing up to 4 GN 1/1 trays (53x32.5 cm) or 7 GN1/1 trays with a maximum height of 350 mm;**
- **2 wash cycles of 90/120 sec** ;
- **hourly productivity: 30-40 baskets/h;**
- **useful washing height : 350 mm;**
- water consumption per cycle 2 liters;
- **washing pump power Kw.0.55** ;
- tank capacity: 20 litres;
- boiler capacity: 5 litres;
- tank resistance: 2.4 kW;
- boiler resistance: Kw.3.00;
- dim.mm.572x633/1038x814h

Supplied :

- 1 basket 500 x 500 mm for 12/18 plates;
- 1 Glass basket 500 x 500 m;
- 1 Spoon Holder Basket;
- 1 water inlet hose (2 m long);
- 1 Drain Hose (2.5 m long).

Accessories/Options :


- **Drain pump** kit
- Bath detergent dispenser kit
- **Tank filter** kit for mod. 50x50
- **Stainless steel basket holder base** for mod. 50x50
- Basket for glasses 50x50 cm
- Dishes basket 50x50 cm

CE mark
Made in Italy


TECHNICAL CARD

power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	3,55
net weight (Kg)	49
gross weight (Kg)	57
breadth (mm)	572
depth (mm)	633
height (mm)	814

TECHNICAL CARD

CODE/PICTURES	DESCRIPTION	PRICE/DELIVERY
<p>TCF055-0450</p> 	<p>Basket 50x50 plates 500x500 mm dish basket</p>	<p>€ 32,40 VAT excluded Shipping to be calculated Delivery from 4 to 9 days</p>

TCF055-0460




Basket 50x50 glasses
500x500 mm glasses basket

€ 29,46

VAT excluded
Shipping to be calculated

Delivery from 4 to 9 days

TCF055-0480




Detergent dosing kit
Detergent dosing kit

€ 83,20

VAT excluded
Shipping to be calculated

Delivery from 4 to 9 days

TCF055-0475




Tank Filter Kit
Tank filter kit for mod. 50x50

€ 93,60

VAT excluded
Shipping to be calculated

Delivery from 4 to 9 days

TCF055-0485



Drain Pump Kit
Underbase drain pump kit

€ 93,60

VAT excluded
Shipping to be calculated

Delivery from 4 to 9 days

TCF055-0470





Base unit for dishwasher with guides for 50x50 cm baskets
Stainless steel base suitable for dishwashers with basket guides cm.50x50, dim.cm.57x62x55/61h.

€ 250,13

VAT excluded
Shipping to be calculated

Delivery from 4 to 9 days

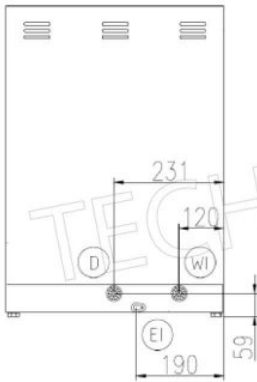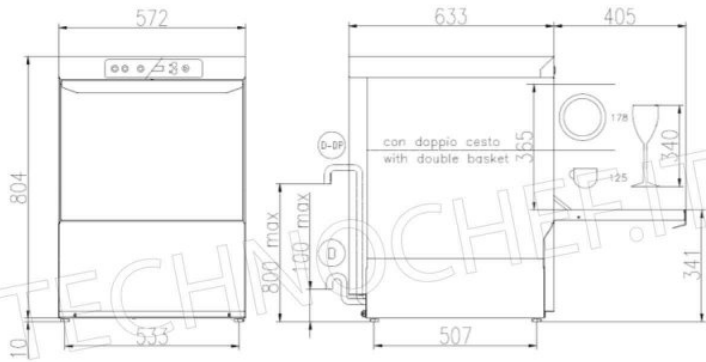

(EI) CAVO DI ALIMENTAZIONE
POWER CORD SUPPLY
CABLE D'ALIMENTATION
CABLE DE ALIMENTACION

(WI) CANNA DI CARICO G 3/4 L=2000 mm
G 3/4 INLET HOSE L=2000 mm
TUYAU D'ALIMENTATION G 3/4" L=2000 mm
TUBO DE ALIMENTACION G 3/4" L=2000 mm

(D) TUBO DI SCARICO ø 29 mm L=2500 mm
DRAIN HOSE ø 29 mm L=2500 mm
TUYAU DE VIDANGE ø 29 mm L=2500 mm
TUBO DE DESAGUE ø 29 mm L=2500 mm

(D-BP) TUBO DI SCARICO ø 29 mm L=2500 mm (CON POMPA SCARICO)
DRAIN HOSE ø 29 mm L=2500 mm (WITH DRAIN PUMP)
TUYAU DE VIDANGE ø 29 mm L=2500 mm (AVEC POMPE DE VIDANGE)
TUBO DE DESAGUE ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)